


level

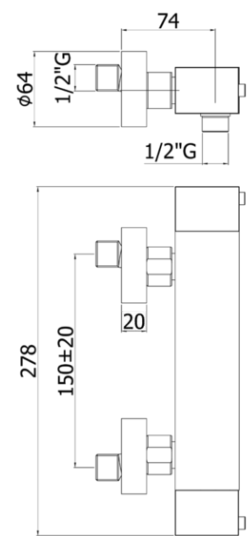

- Thermostatic shower mixer complete with:
- ECO-STOP flow reducer
- set of 2 S-wall-unions 1/2"x3/4"G and wall-plates
- 1/2"G connections
- Thermostatic shower mixer complete with:
- ECO-STOP flow reducer
- set of 2 S-wall-unions 1/2"x3/4"G and wall-plates
- 1/2"G connections

ARTICOLO ARTICLE

LEQ 268..

- without shower set
- without shower set

LEQ 268D..

- with ABS joint wall bracket
- with hand-shower and flexible hose
- with ABS joint wall bracket
- with hand-shower and flexible hose

RAPPORTO PROVA PORTATA FLOW RATE REPORT

	Uscita outlet	Pressione / Pressure (bar)									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		9.21	13.14	16.11	18.63	20.85	22.91	24.78	26.58	28.08	29.69

DOCUMENTI TECNICITECHNICAL DOCUMENTS

